

J FILTERS

Highlights

- Polypropylene or PVDF : great resistance to acids and alkalines
- Welded tank, no seals, no risks of leaks
- Intank assembly : no risks of leaks outside the bath
- Out of tank assembly : space gained in the tank
- Quick opening lid



Technical features


Materials		PP - PVDF
Max temperature	PP	80°C
	PVDF	110°C
Filtration rate		0,2 -> 100 µm
Pumps		ST10 - ST30 - ST32 - ST50 - ST52
Flowrates		0,5 -> 4,5 m³/h
Connections		Threaded - Grooved nozzles

Filtration media



1 Wound cartridge : 1 x 10"

Flowrate charts

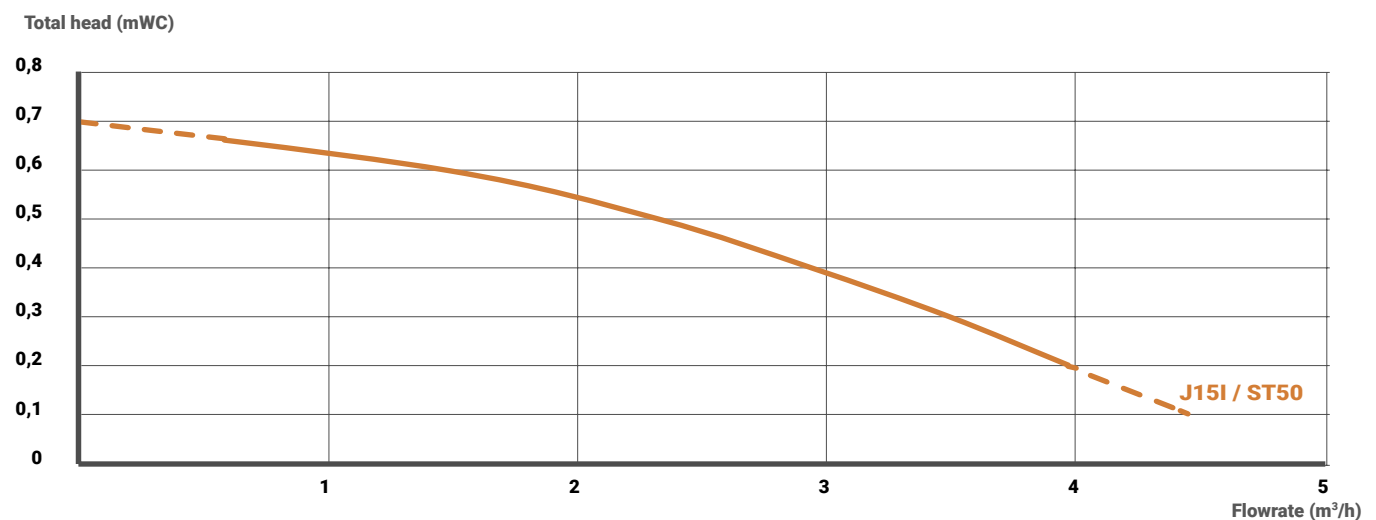

Dimensions

