

## J FILTERS

### Highlights

- Polypropylene or PVDF : great resistance to acids and alkalines
- Intank assembly : no risks of leaks outside the bath
- Out of tank assembly : space gained in the tank



### Technical features


<b>Materials</b>		PP - PVDF
<b>Max temperature</b>	<b>PP</b>	80°C
	<b>PVDF</b>	110°C
<b>Filtration rate</b>		0,2 -> 100 µm
<b>Pumps</b>		ST 50 - ST52
<b>Flowrates</b>		0,2 - 5 m³/h
<b>Connections</b>		Threaded, union nut, grooved nozzle, flanges

### Filtration media



**1** Wound cartridges 3 x 10"

### Flowrate charts

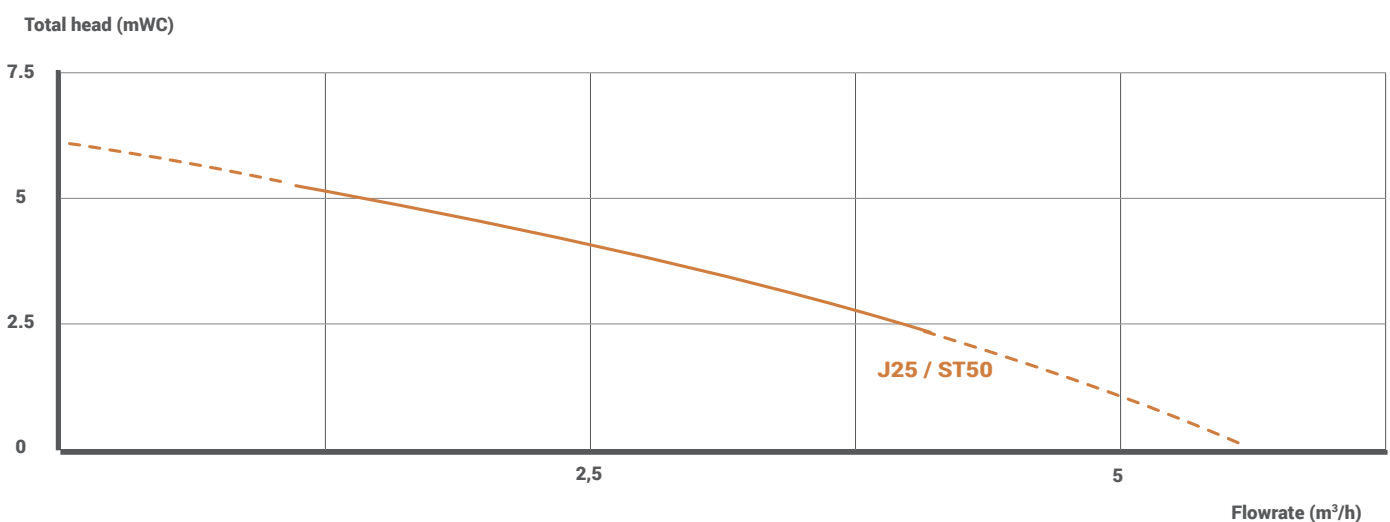

# J 25

J FILTERS



## Dimensions

