

EN Data sheet


Double tank medium flow filter on a choice of 20" or 30".



FILTRATION MEDIAS

- 1 LTECH pleated cartridge : 2 x 20" or 30" (5m² or 7,5m²)
- 2 Wound cartridges : 2 x 7 of 20" or 30"
- 3 Plates : 2 x 64 / 96 (2 x 1,44m² / 2 x 2,16m²) / 2 x 64 (2 x 1,44m²)*
- 4 Activated carbon : 2 x 11,6L in 20" & 2 x 17,3L in 30"
- 5 Bags : 2 bags size 10

FLOWRATE CHARTS

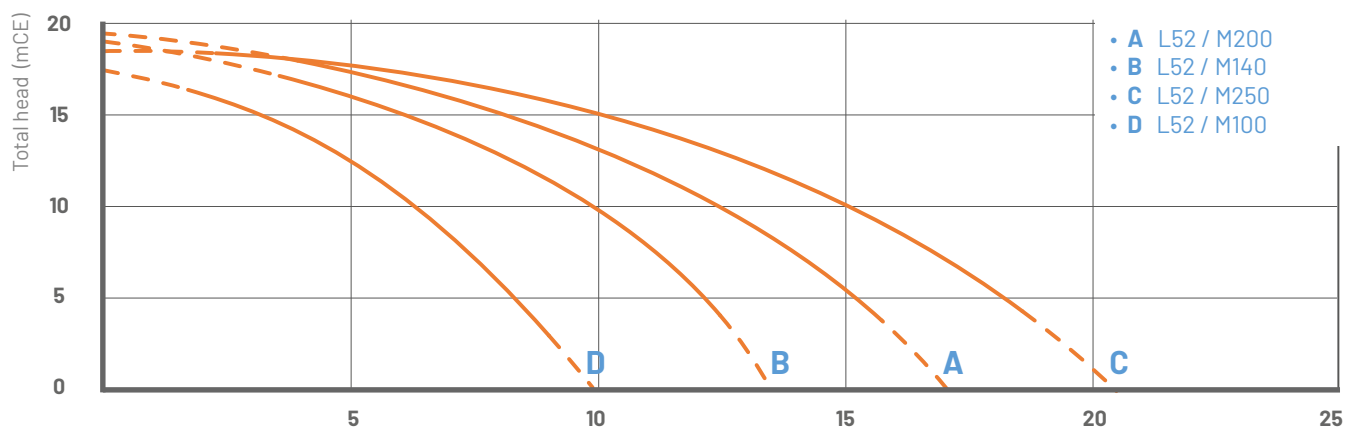

*Flow rates measured with 2 LTECH cartridge with 20°C water. Flow rate varies depending on the filtration media.

ADVANTAGES

Excellent resistance to acids and bases thanks to injected polypropylene or PVDF.

Welded tank, no gaskets, no risk of leakage.

Side pannels protecting the pump from splashes.

Quick opening lid.

Wide range of interchangeable media.

SPECIFICATION

Performances

Max flow rate (m ³ /h)	11.5 -> 21 (PP) ; 9 -> 21 (PVDF)
Max temperature (°C)	80 (PP) - 110 (PVDF)
Filtration fineness (µm)	0,2 -> 100

Motor

Maximum power (W)	1500
-------------------	------

Design

Technology	Magnetic drive
------------	----------------

Available materials

Polypropylene (PP)
Polyvinylidene fluoride (PVDF)

Seals

EPDM - FPM - NBR

Pumps

M100 - M140 - M200 - M250

Connections

Grooved nozzle, Union nut, Flange, Threaded


Coating tank

See L58 - L88 version



DIMENSIONS

Units : mm

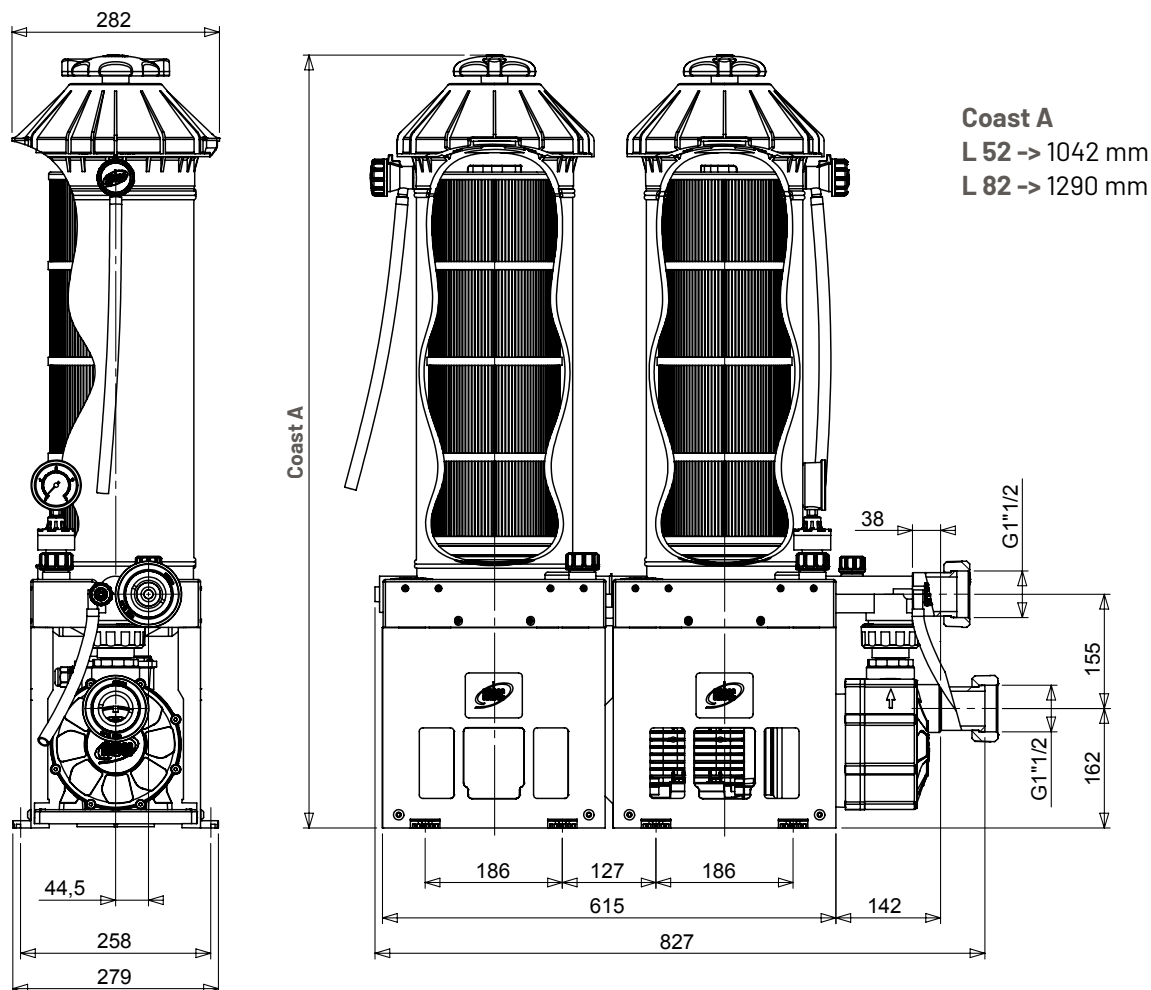

CONNECTIONS

		Union nut ØA - B
M100 / M140	Pump input	2"1/4 (DN40) - 58
	Filter output	2"1/4 (DN40) - 60
M200 / M250	Pump input	2"3/4 (DN50) - 60
	Filter output	2"1/4 (DN40) - 60
A18 / A19	Pump input	2"1/4 (DN40) - 58
	Filter output	2"1/4 (DN40) - 60

