

EN Data sheet


Medium flow filter with coating tank on a choice of 20" or 30".



FILTRATION MEDIAS

- 1 LTECH pleated cartridge : 20" or 30" (5m² or 7,5m²)
- 2 Wound cartridges : 7 of 20" or 30"
- 3 Plates : 64 or 96 (1,44m² or 2,16m²)
- 4 Activated carbon : 11,6L up to 17,3L
- 5 Bag : 1 bag size 10

FLOWRATE CHARTS

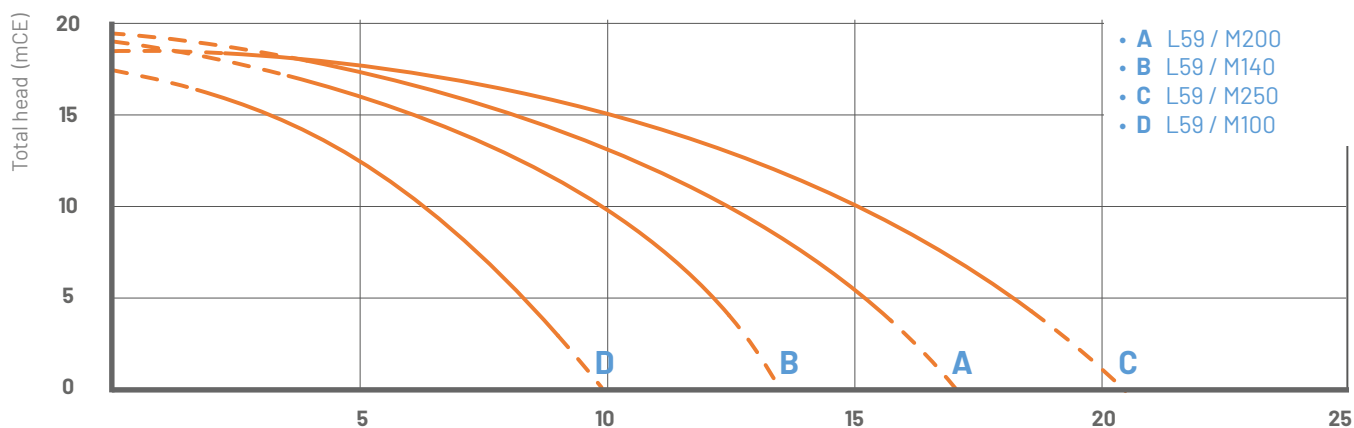

*Flow rates measured with 2 L-TECH cartridges with 20°C water. Flow rate varies depending on the filtration media.

ADVANTAGES

Excellent resistance to acids and bases thanks to injected polypropylene or PVDF.

Welded tank, no gaskets, no risk of leakage.

Side pannels protecting the pump from splashes.

Quick opening lid.

Wide range of interchangeable media.

Dissolution tank.

SPECIFICATION

Performances

Max flow rate (m³/h) 11.5 -> 21 (PP) ; 9 -> 21 (PVDF)

Max temperature (°C) 80 (PP) - 110 (PVDF)

Filtration fineness (µm) 0,2 -> 100

Motor

Maximum power (W) 1500

Design

Technology Magnetic drive

Available materials Polypropylene (PP)
Polyvinylidene fluoride (PVDF)

Seals EPDM - FPM - NBR

Pumps M100 - M140 - M200 - M250

Connections Grooved nozzle, Union nut, Flange, Threaded

Coating tank 16 L




DIMENSIONS

Units : mm

Coast A


L 59 -> 1202 mm

L 89 -> 1456 mm

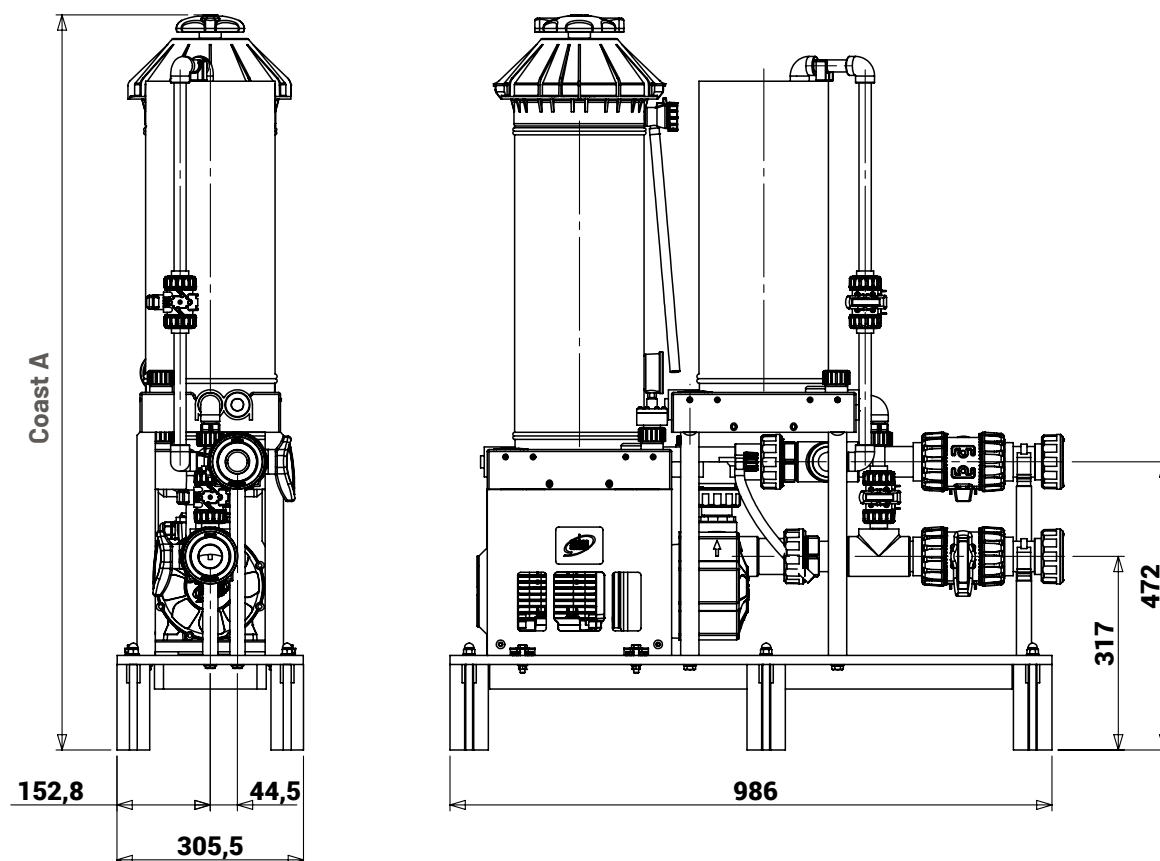

CONNECTIONS

		Union nut ØA
M100 / M140	Pump input	2"1/4 (DN40)
	Filter output	2"1/4 (DN40)
M200 / M250	Pump input	2"3/4 (DN50)
	Filter output	2"1/4 (DN40)
A18 / A19	Pump input	2"1/4 (DN40)
	Filter output	2"1/4 (DN40)

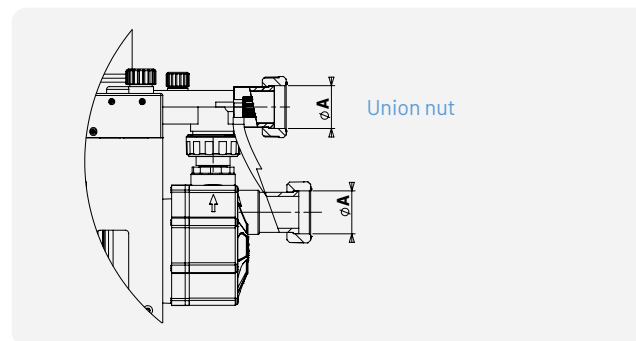

SIEBEC SAS
contact@siebec.com



SIEBEC Ltd
sales@siebec.co.uk



SIEBEC S.L.
ventas@siebec.com



SIEBEC SRL
commerciale@siebec.com



SIEBEC GmbH
info@siebec.de



SIEBEC LDA
info.pt@siebec.com

We are here to help.
Contact us!

