

This filtration skid offers a simple, self-contained solution for treating particulate and oily pollution in your fluids.




#### **Complete filtration**

Removes solid particles (coarse and fine) and supernatant or emulsified whole oils.



#### Self-contained

A seal or magnetic drive pump transfers the liquid.





Boxed version of the MINIPURE™



#### **Options**

- SAFTECH: dry run protection
- Mobile cart or skid
- · Carterised station
- Fixed surface skimmer for collecting supernatant oil

#### **OILMAX**<sup>TM</sup>

# High-capacity de-oiling

This skid enables you to treat and recover large quantities of supernatant oils from your effluents.



#### **Excellent phase shift**

Optimised coalescence provides highperformance phase shifting for sensitive applications.



#### High-capacity pre-filter

BAGTECH technology combined with MAGTECH magnetic filtration for high-efficiency pre-filtration.



The oil present in the liquid in the form of microdroplets accumulates on the PP coalescing media, then migrates to the surface before being recovered.

### **Options**

- Programmer: automatic extraction
- Mobile version with rolling chassis
- Floating skimmer for variable levels
- Fixed skimmer for stable levels


















## CENTRIPURE

HIGH-CAPACITY LIQUID FILTRATION



This treatment skid incorporates automatic pre-filtration with unrolling media.

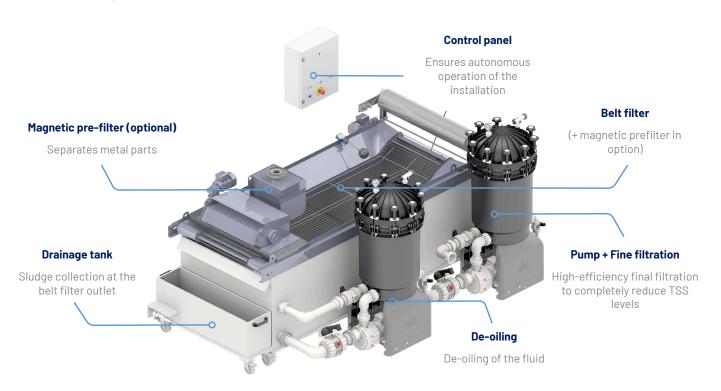



#### **Temperature control**

The COOLTECH™ option



#### Custom-made design.

Because our clients have different needs, we design CENTRIPURE  $^{\text{\tiny TM}}$  following your specifications.

#### **CUSTOM FILTRATION**

# Compatible interchangeable media





### BAGTECH™

Pre-filtration bag Filtration from 150 to 600 µm. Washable and reusable. No tools required for installation.



# FILTECH<sup>TM</sup>

cartridge. Filtration 1 to 100 μm. Washable and reusable. No tools required for installation.



#### **MAGTECH™**

Magnetic filtration.
5 kg of particles captured.
Easy to install and clean.
3000 to 11000 Gauss power.



## OILTECH<sup>III</sup>

De-oiling microfibres. Hydrophobic fibres. 500g captures 6 I of oil. High retention capacity.



#### **BANDTECH**<sup>™</sup>

Wide range of materials and porosities.