




ABMESSUNGEN

Modell	Behälter- kapazität (l)	Filter- fläche (m ²)	Durch- fluss (l/ min)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	Gesam- tge- wicht (kg)	Leistung 50 Hz (kW)	Strom- stärke (A)
S R	150	0.3	40	1180	1430	580	250	950	500	115	0.12	0.75
S 1	200	0.4	50	1480	1730	580	250	1250	500	130	0.12	0.75
S 2	300	0.8	100	1630	1880	780	250	1400	700	165	0.12	0.75
S 3-1500	450	1.25	150	1730	1980	1080	250	1500	1000	214	0.12	0.75
S 3-2000	600	1.75	200	2230	2480	1080	250	2000	1000	253	0.12	0.75
S 3-2500	750	2.2	250	2730	2980	1080	250	2500	1000	330	0.18	0.59
S 3-3000	900	2.7	300	3230	3480	1080	250	3000	1000	379	0.18	0.59
S 3-3500	1050	3.2	350	3730	3980	1080	250	3500	1000	425	0.18	0.59
S 3-4000	1200	3.7	400	4230	4480	1080	250	4000	1000	473	0.18	0.59
S 3-4500	1350	4.2	450	4730	4980	1080	250	4500	1000	495	0.18	0.59
S 3-5000	1500	4.7	500	5230	5480	1080	250	5000	1000	567	0.18	0.59

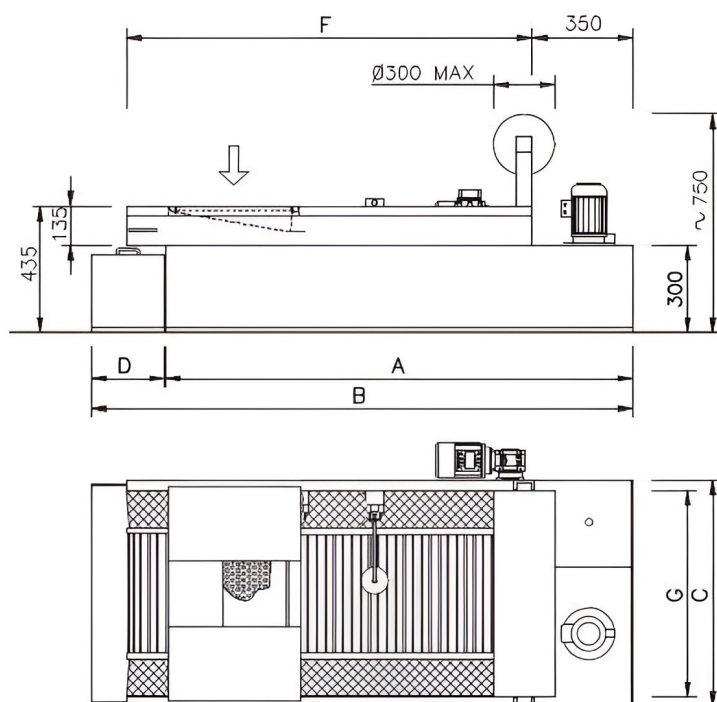